


METER SIZE	A	B
5/8" X 3/4"	7 1/2"	12 1/2"
1"	10 3/4"	16 1/4"
1 1/2"	12 5/8"	23 3/4"
2"	15 1/4"	15 1/4"
3"	17"	17"

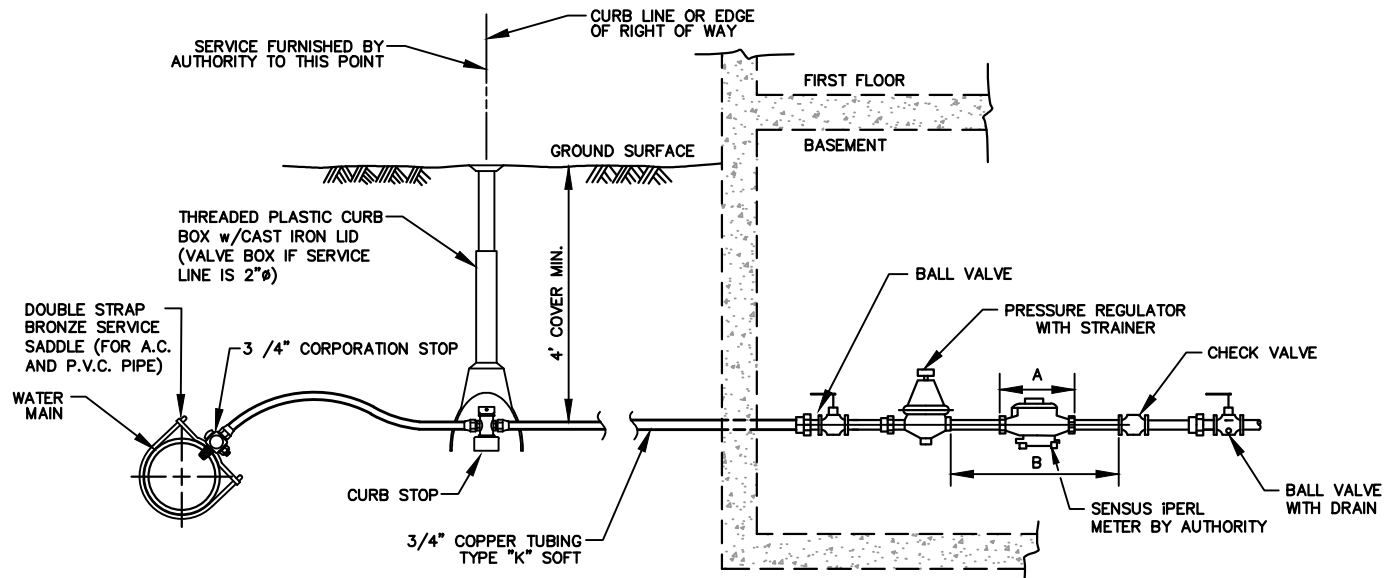

INSTALLATION NOTES:

1. DIMENSION "B" INCLUDES METER COUPLINGS OR FLANGES.
2. 3/4" CHECK VALVE, BRASS, IRON PIPE THREADS.
3. SHUT-OFF VALVE INSTALLED BEFORE PRESSURE REGULATOR – TO ENABLE PRESSURE REGULATOR TO BE CLEANED
4. PRESSURE REGULATOR INSTALLED BEFORE WATER METER – WITH NO MORE THAN 75 PSI MAXIMUM.
5. REMOTE READOUT, IF INSTALLED, SHALL BE MOUNTED AT AN UNOBSTRUCTED LOCATION AND AT EYE LEVEL.
6. NO SWEAT JOINTS BEFORE THE WATER METER.
7. WELL SUPPLY MUST BE PHYSICALLY DISCONNECTED OR SEPARATED FROM THE PLUMBING SYSTEM BEFORE THE WATER METER IS INSTALLED.

NOTE: DOMESTIC METER
FURNISHED AND INSTALLED
BY THE AUTHORITY

1	REVISION 1	07-23-2025	H.E.B.
NO.	REVISION	DATE	BY
THE MUNICIPAL AUTHORITY OF THE TOWNSHIP OF WASHINGTON			
FAYETTE COUNTY		PENNSYLVANIA	
SERVICE CONNECTION DETAIL			
	BANKSON ENGINEERS, INC.		SCALE NONE
	CONSULTING ENGINEERS CHESWICK, PA 15024		DATE SEPT. 2012
		DRAWN BY D.R.S.	SHEETS IN SET 1
		APPROVED BY D.W.K.	DRAWING NUMBER 2-514-40-1